

Order a roll
today!
(800) 518 -2290



www.usfabricsinc.com

US 180NW COW CARPET®

According to the **Pennsylvania Small Scale Livestock Committee**, "Mud creates an unhealthy environment for both horses and livestock." Mud is a pervasive and expensive problem facing beef and dairy producers as well as horse farms. US 180NW Cow Carpet® is the solution.

Larry W. Turner, Extension Agricultural Engineer states: "Mud robs . . . beef and dairy producers of performance from their cattle herds in winter and spring conditions. To help avoid the problems associated with mud . . . [an] all-weather surface can be constructed of geotextile fabric [cow carpet®], rock and fine surface cover for less than 1/3 of the cost of concrete."

US 180NW Cow Carpet® will keep your cover material from disappearing into the subgrade and prevent the mud below from intermixing with your cover material. In addition, US 180NW Cow Carpet® will improve the footing and hoof health of your horses and cattle.

Roll Size 15' x 300' (500 sqy)

US 180NW Cow Carpet® meets the Natural Resources Conservation Service Class 1 Nonwoven Geotextile Fabric Specification.

US 180NW APPLICATIONS

- Exercise Rinks
- Water Troughs
- Stream Crossings & Banks
- Pond Entrances & Exits
- Water Troughs
- Feed Bunks
- Stables & Paddocks
- Roadway Separation

3904 Virginia Ave • Cincinnati, Ohio 45227 • Phone (800) 518-2290 • Fax (513) 271-4420
www.usfabricsinc.com




US 180NW

3904 Virginia Ave • Cincinnati, Ohio 45227 • Phone (513) 271-6000 • Fax (513) 271-4420

Cow Carpet® Nonwoven Geotextile

A 7.0 oz/sy nonwoven needlepunched geotextile made of 100% polypropylene staple filaments. This product can also be used for drainage applications, separation under roads, driveways or parking areas.

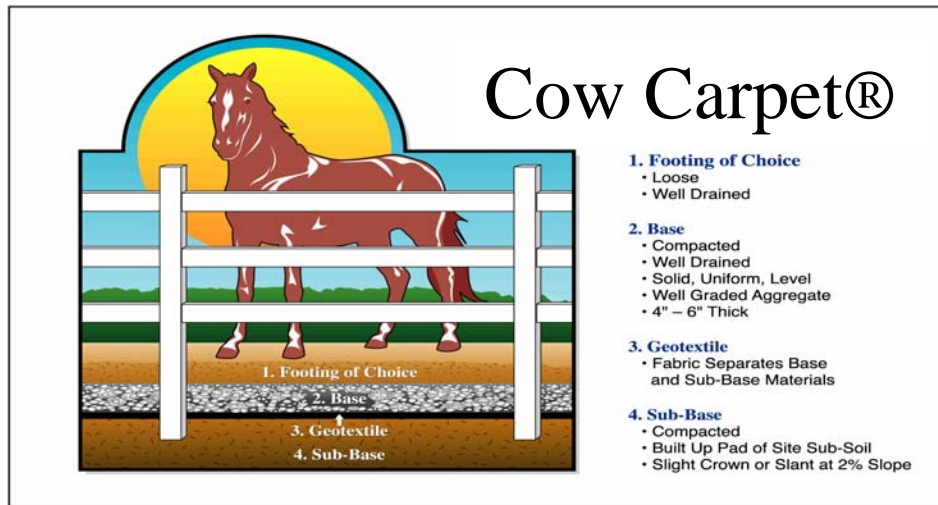

PROPERTY	TEST METHOD	ENGLISH	METRIC
Tensile Strength	ASTM D-4632	180 lbs	800 N
Elongation @ Break	ASTM D-4632	50 %	50 %
Mullen Burst	ASTM D-3786	350 psi	2412 kPa
Puncture Strength	ASTM D-4833	105 lbs	467 N
Trapezoidal Tear	ASTM D-4533	75 lbs	333 N
Apparent Opening Size	ASTM D-4751	70 US Sieve	0.212 mm
Permittivity	ASTM D-4491	1.50 Sec ⁻¹	1.50 Sec ⁻¹
UV Resistance, % Retained	ASTM D-4355	70 %	70 %
Flow Rate	ASTM D-4491	100 gal/min/sf	4074 l/min.m ²
Roll Weight	12.5 x 360 15 x 300	233 lbs 235 lbs	----

The above information is to the best of our knowledge accurate, but is not intended to be considered as a guarantee. Any implied warranty for a particular use or purpose is excluded. If the Product does not meet the above properties, and notice is given to US Fabrics, Inc., the product will be replaced or refunded. (1/2009).