




EGA 30

Envirogrid EGA GeoCell

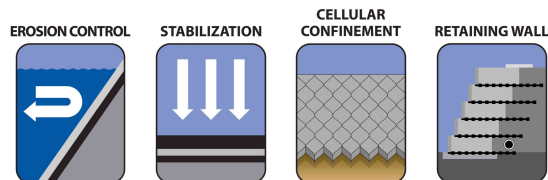

EnviroGrid® EGA 30 is a three-dimensional cellular confinement system that provides confinement and reinforcement to granular material for load support erosion control, slope protection and retaining wall applications.

EnviroGrid® EGA 30 sections are manufactured from 58 strips of HDPE, resulting in a section length of 29 cells. Each strip is the approved width and 142 inches (3.6m) in length.



PROPERTY	TEST METHOD	ENGLISH	METRIC
Cell Depth 4 Cell Depths Available	Measured	3 , 4 , 6 , 8 inches	75 , 100 , 150 , 200 mm
Expanded Cell Size (length x width) Nominal	Measured	12.6 x 11.3 inches	320 x 287 mm
Expanded Cell Area Nominal	Measured	71.3 in	460 cm
Expanded Section Area Nominal	Measured	230 f ²	21.4 m ²
Expanded Section Size (width x length) Maximum	Measured	7.6 x 30 ft	2.3 x 9.1 m
Expanded Section Size (width x length) Minimum	Measured	9.2 x 24.8 ft	2.8 x 7.6 m
Expanded Section Size (width x length) Nominal	Measured	8.4 x 27.4 ft	2.56 x 8.35 m
Seam Peel Strength Minimum (>)		80 lbf/in	142 N/cm
Seam Peel Strength ⁽¹⁾ Long Term	See Notes	160 lb	710 N
Internal Junction Efficiency ⁽²⁾ (>)	See Notes	100 %	100 %
Mechanical Junction Efficiency ⁽²⁾ (>)	See Notes	100 %	100 %
Peak Friction Angle Ratio ⁽³⁾		0.95	0.95
Environmental Stress Crack Resistance	ASTM D-1693	5,000 hours	
Oxidation Resistance ⁽⁵⁾ (>)	EN ISO 13438	100	years
Weathering Resistance ⁽⁶⁾	EN ISO 12224	100	%
Polymer Density	ASTM D-1505	0.935 x 0.965 lb/ft ³	0.935 x 0.965 g/cm ³
Flexural Storage Modulus (>)	ISO 6721	800 MPA	800 MPA

US Fabrics, Inc. | 3904 Virginia Avenue | Cincinnati, OH 45227
Phone: (800) 518-2290 | Fax: (513) 271-4420 | email: info@usfabrics.com

This information is provided for reference only and is not intended as a warranty or guarantee.
 US Fabrics assumes no liability in connection with the use of this information.

PROPERTY	TEST METHOD	ENGLISH	METRIC
Carbon Black Content ⁽⁴⁾	<u>ASTM D-1603</u>	1.5 - 2 %	1.5 - 2 %
Texture Density Shape: Romboidal		22 - 31 indentations /cm ²	22 - 31 indentations /cm ²
Sheet Thickness (before/after texturing)	<u>ASTM D-5199</u>	50 - 60 mils (-5% +10%)	1.27 - 1.52 mm (-5% +10%)

⁽¹⁾ A 4" (100mm) wide seam sample shall support a 160lb (72.5kg)load for a period of 7 days minimum in a temperature-controlled environment undergoing a temperature change on a 10 hour cycle from ambient room to 130°F (54°C). Ambient room temperature per ASTM E 41.

⁽²⁾ Junction efficiency determined as a percentage of junction performance (EN ISO 13426-1) to perforated strip performance (EN ISO 10319).

⁽³⁾ Value for clean granular infill material.

⁽⁴⁾ Standard black HDPE strips. For tan/green EnviroGrid®, hindered amine light stabilizer (HALS) content will be 2.0% by weight of carrier.

⁽⁵⁾ Predicted to be durable for a minimum of 100 years in natural soil with a pH between 4 and 9 and at soil temperature <25°C. Testing was conducted at 100°C.

⁽⁶⁾100% of original tensile strength retained following exposure to intense UV radiation and accelerated weathering in accordance with EN 12224.