




US 270

Woven Geotextile

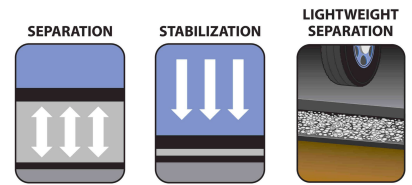

US 270 is a woven geotextile made of 100% polypropylene slit film yarns. This product provides separation of the aggregate from the subgrade and has high tensile strength and modulus, adding reinforcement to the foundation soil. US 270 meets the following M.A.R.V. values except where noted:



PROPERTY	TEST METHOD	ENGLISH	METRIC
Weight Typical	ASTM D-5261	5.6 oz/y ²	189.84 g/m ²
Grab Tensile Strength	ASTM D-4632	270 lbs	1,200 N
Elongation @ Break	ASTM D-4632	15 %	15 %
Mullen Burst ⁽³⁾	ASTM D-3786	500 psi	3,447 kPa
Pin Puncture ⁽³⁾	ASTM D-4833	100 lbs	445 N
CBR Puncture	ASTM D-6241	1,000 lbs	4,450 N
Trapezoidal Tear	ASTM D-4533	100 lbs	445 N
Apparent Opening Size ^(1,2)	ASTM D-4751	40 US Sieve	0.425 mm
Permittivity ⁽¹⁾	ASTM D-4491	0.05 Sec ⁻¹	0.05 Sec ⁻¹
Water Flow Rate ⁽¹⁾	ASTM D-4491	4 g/min/f ²	163 L/min/m ²
UV Resistance @ 500 Hours	ASTM D-4355	70 %	70 %

⁽¹⁾ At the time of manufacturing. Handling, storage, and shipping may change these properties.

⁽²⁾ Maximum average roll value (MaxARV).

⁽³⁾ Historical reference values. These properties are no longer recognized by ASTM or AASHTO for geosynthetics.

US 270 Shipping & Packaging Information

SIZE	DIAMETER	WIDTH	WEIGHT	AREA	ROLLS PER TRAILER
12.5' x 360'	12"	12.5'	215 lbs	500 y ²	204
15' x 300'	12"	15'	215 lbs	500 y ²	204
17.5' x 258'	12"	17.5'	215 lbs	500 y ²	204

US Fabrics, Inc. | 3904 Virginia Avenue | Cincinnati, OH 45227
Phone: (800) 518-2290 | Fax: (513) 271-4420 | email: info@usfabrics.com

This information is provided for reference only and is not intended as a warranty or guarantee.
 US Fabrics assumes no liability in connection with the use of this information.